

Imagine.


 Roland®

DVE
Digital Value Engineering


CAMM-1 PRO

GX-640 / GX-500 / GX-400 / GX-300

Shift Your Business into High Gear with the World's Most Advanced Cutter Line

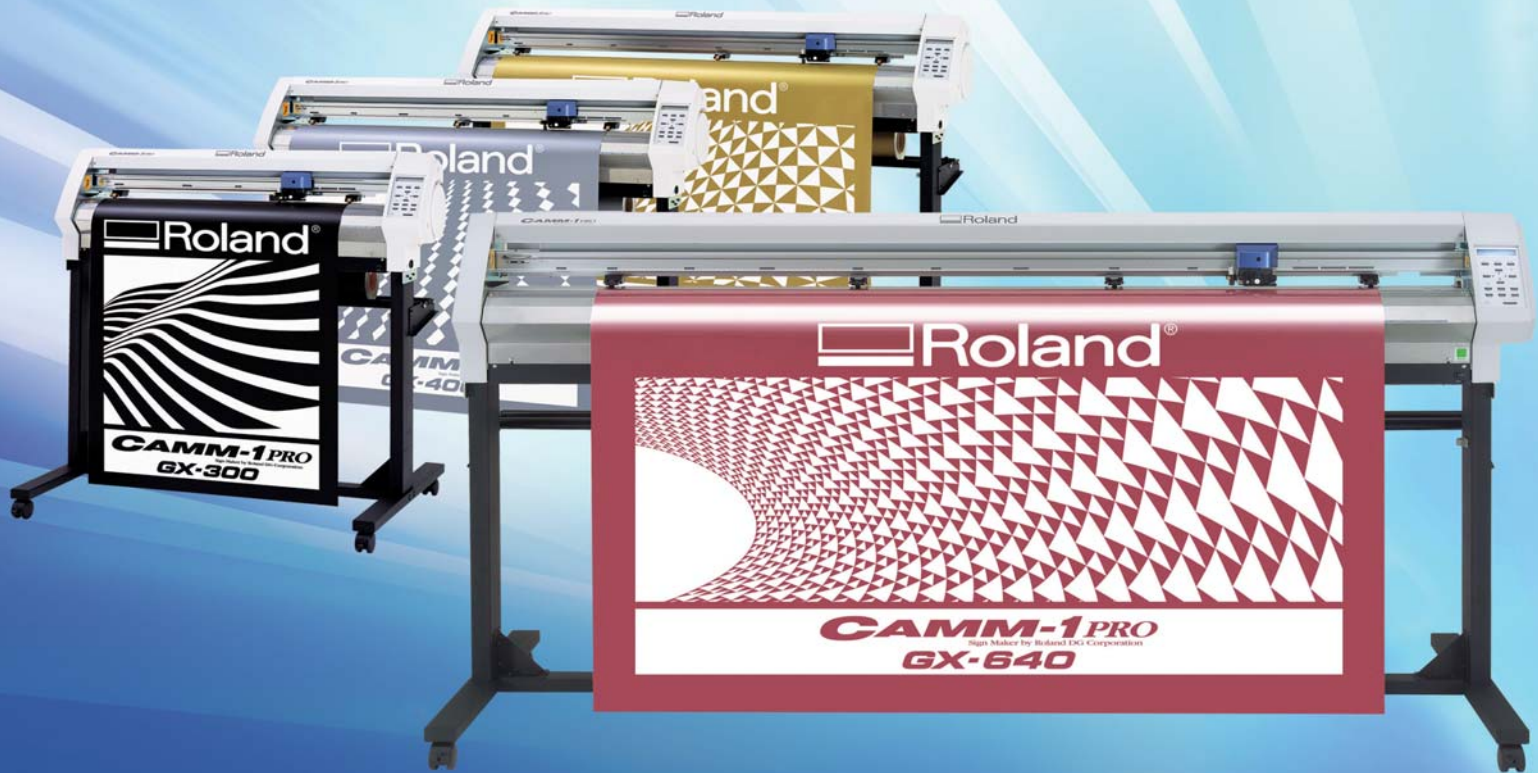


Create custom window tinting, clear paint protectant and bold vinyl graphics

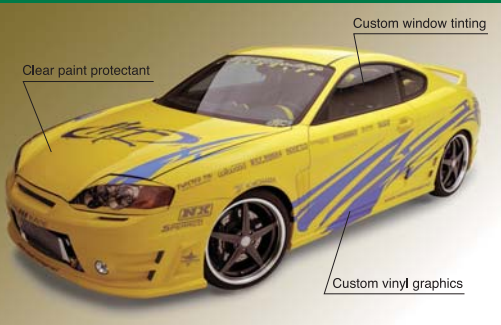

Contour cut pre-printed thermal transfer graphics, ideal for personalizing dark apparel.



Produce durable, eye-catching outdoor signage.

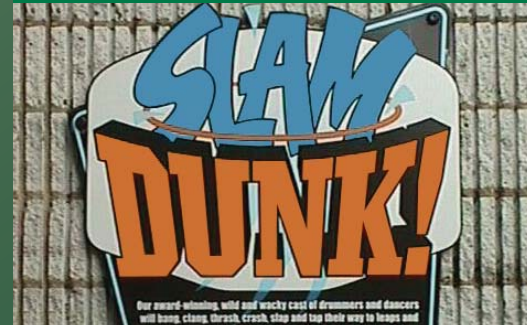

Discover the Proven Performance of CAMM-1 Pro Cutters

Powered by digital servomotors, Roland CAMM-1 Pro professional vinyl cutters are highly accurate and faster than ever with cutting speeds up to 850 mm per second and support for up to 350 grams of pressure. With the CAMM-1 Pro, your vehicle graphics, window tints, signage, labels, stencils and pinstriping come out crisp and clean. Choose the 64-inch GX-640 for the largest jobs and heavy materials including sandblast media. This newest model features our most powerful servomotor yet and a "heavy mode" function for great results on the thickest media.

Pair your CAMM-1 Pro with a Roland inkjet printer to create custom t-shirt heat-transfers, full-color POP displays, vehicle wraps, labels and decals. Every Roland inkjet printer includes VersaWorks RIP software

with advanced features that allow your CAMM-1 Pro to contour cut finished prints. Simply include crop marks with your design, print the graphic on your Roland inkjet printer and then load the printed media on the CAMM-1 Pro. The CAMM-1 Pro automatically aligns and cuts the graphic for precision results.

CAMM-1 Pro cutters come complete with Roland CutStudio™ design software, allowing you to quickly enlarge, reduce, reposition, rotate and mirror images. The software even allows you to cut True Type fonts without outlining. BMP, JPG, STX, AI and EPS file formats are all supported.





Specifications	GX-640	GX-500	GX-400	GX-300
Mechanism / Driving method	Friction feed / Digital control servo motor			
Maximum cutting area	Width: 1,575 mm (62 in.) EXTEND: 1,626 mm (64 in.) Length: 24,998 mm (984-1/8 in.)	Width: 1,195 mm (47 in.) Length: 24,998 mm (984-1/8 in.)	Width: 1,000 mm (39 in.) Length: 24,998 mm (984-1/8 in.)	Width: 737 mm (29 in.) Length: 24,998 mm (984-1/8 in.)
Acceptable media widths	Min. 130 mm (5-1/16 in.) Max. 1,842 mm (72-1/2 in.)	Min. 90 mm (3-1/2 in.) Max. 1,372 mm (54 in.)	Min. 90 mm (3-1/2 in.) Max. 1,178 mm (46 in.)	Min. 50 mm (2 in.)/Max. 915 mm (36 in.) (50 to 540 mm (2 in. to 21 in.), 582 to 915 mm (23 in. to 36 in.))
Width of material that can be cut off	0 to 1,778 mm (0 in. to 70 in.)	0 to 1,270 mm (0 in. to 50 in.)	0 to 1,067 mm (0 in. to 42 in.)	0 to 812 mm (0 in. to 32 in.)
Tools	Special blade for CAMM-1 series			
Maximum cutting speed	During cutting: 850 mm/sec. (in all directions) During tool-up: 1202 mm/sec. (in 45 direction)			
Cutting speed / Blade force	10 to 850 mm/sec. (in increments of 10 mm/sec.) / 20 to 350 gf			
Mechanical resolution	0.0035 mm/step (0.000137 in./step)	0.0125 mm/step (0.000492 in./step)		
Software resolution	0.025 mm/step (0.000984 in./step)			
Distance accuracy (*1)	Error of less than ±0.2% of distance traveled, or 0.1 mm (0.00394 in.), whichever is greater			
Repetition accuracy (*1) (*2) (*3)	0.1 mm or less			
Interface	Serial (RS-232C-compatible), USB (Rev 1.1)			
Replot memory	2 MB (buffer size: 8 MB)			
Power supply / Power consumption	AC 100V to 240V ±10% 50/60 Hz 1.2A / Approx. 100W			AC 100V to 240V ±10% 50/60 Hz 1.1A / Approx. 95W
Dimensions with stand	2,115 mm (W) x 727 mm (D) x 1,113 mm (H) (83-1/4 in. (W) x 28-5/8 in. (D) x 43-13/16 in. (H))	1,602 mm (W) x 727 mm (D) x 1,113 mm (H) (63-1/16 in. (W) x 28-5/8 in. (D) x 43-13/16 in. (H))	1,407 mm (W) x 727 mm (D) x 1,113 mm (H) (55-3/8 in. (W) x 28-5/8 in. (D) x 43-13/16 in. (H))	1,144 mm (W) x 727 mm (D) x 1,113 mm (H) (45-1/16 in. (W) x 28-5/8 in. (D) x 43-13/16 in. (H))
Weight with stand	64 kg (141.1 lb.)	55 kg (121.2 lb.)	51 kg (112.4 lb.)	44 kg (97 lb.)
Operating temperature	5 to 40°C (41 to 104°F)			
Operating humidity	35% to 80% (non - condensing)			
Included items	Power cord, blade holder (XD-CH2), pin, blade(ZEC-U5022), alignment tool, cable clamp, replacement blade for sheet cutter, USB cable, Roland software CD-ROM, setup guide, user's manual			

*1 According to material and cutting conditions as specified by Roland DG Corp. *2 Excluding stretching/contraction of the material

*3 Range for assured repetition accuracy: For materials with a width exceeding 610 mm (24 in.): Length 4,000 mm (157-7/16 in.) (GX-500/400 only) . For materials with a width of 610 mm (24 in.) or less : Length 8,000 mm (314-15/16 in.)

Included Software	Roland CutStudio	Roland CutStudio Plug-in for Adobe® Illustrator®	Roland CutStudio Plug-in for CorelDRAW®
OS	Windows® 7(32/64-bit); Windows Vista® Home Premium/Business(32-bit); Windows® XP Home Edition/Professional(32-bit);	Windows®, Mac OS	Windows®
Application Software		Adobe® Illustrator® CS2/CS3/CS4/CS5	CorelDRAW® X3/X4/X5

Options					
Blades	ZEC-U1715	For cutting sandblast stencils for friction feed, maximum 1.00mm thickness, offset value 0.25mm, 5-pack	Roll hangers	HS-640	For GX-640, 1 set
	ZEC-U3017	For cutting sign vinyl in general plus cutting small letters or intricate designs, offset value 0.175mm, 3-pack		HS-500	For GX-500, 1 set
	ZEC-U3050	For cutting thick material, offset value 0.50mm, 5-pack		HS-400	For GX-400, 1 set
	ZEC-U5022	For cutting sign vinyl in general, offset value 0.25mm, 2-pack		HS-300	For GX-300, 1 set
	ZEC-U5025	For cutting reflective and fluorescent vinyl, as well as sign vinyl in general , offset value 0.25mm, 5-pack			
Blade holders	XD-CH2	For sign vinyl in general as well as thicker material. Performs well for detailed cutting. Blade holder with blade extension adjuster, made of aluminum	Serial cable	XY-RS-34	3m (9.8ft)
	XD-CH3	For sign vinyl in general. Blade holder with blade extension adjuster, made of resin			

Roland DG products (GX-640) that feature this environmental label meet the company's criteria for environmental consciousness, a set of standards based on ISO 14021 self-declaration type II. For more information, please visit www.rolanddg.com.

Roland reserves the right to make changes in specifications, materials or accessories without notice. Your actual output may vary. For optimum output quality, periodic maintenance to critical components may be required. Please contact your Roland dealer for details. No guarantee or warranty is implied other than expressly stated. Roland shall not be liable for any incidental or consequential damages, whether foreseeable or not, caused by defects in such products. Reproduction or use of copyrighted material is governed by local, national, and international laws. Customers are responsible for observing all applicable laws and are liable for any infringement. All trademarks are the property of their respective owners. Roland DG Corp. has licensed the MMP technology from the TPL Group.



AUTHORIZED DEALER:

OLYMP Electronic COM
Jovana Đaje 10 Beograd
Tel/Fax 011/2863-424 3049-355
AUTORISED DISTRIBUTOR
www.olymp.rs office@olymp.rs

Printed in Japan. RDG-416081699 12 JUN H-2 S-S

www.rolanddg.com