




VersaArt™ RE-64O

VERSAART RE-64O 64" INKJET PRINTER

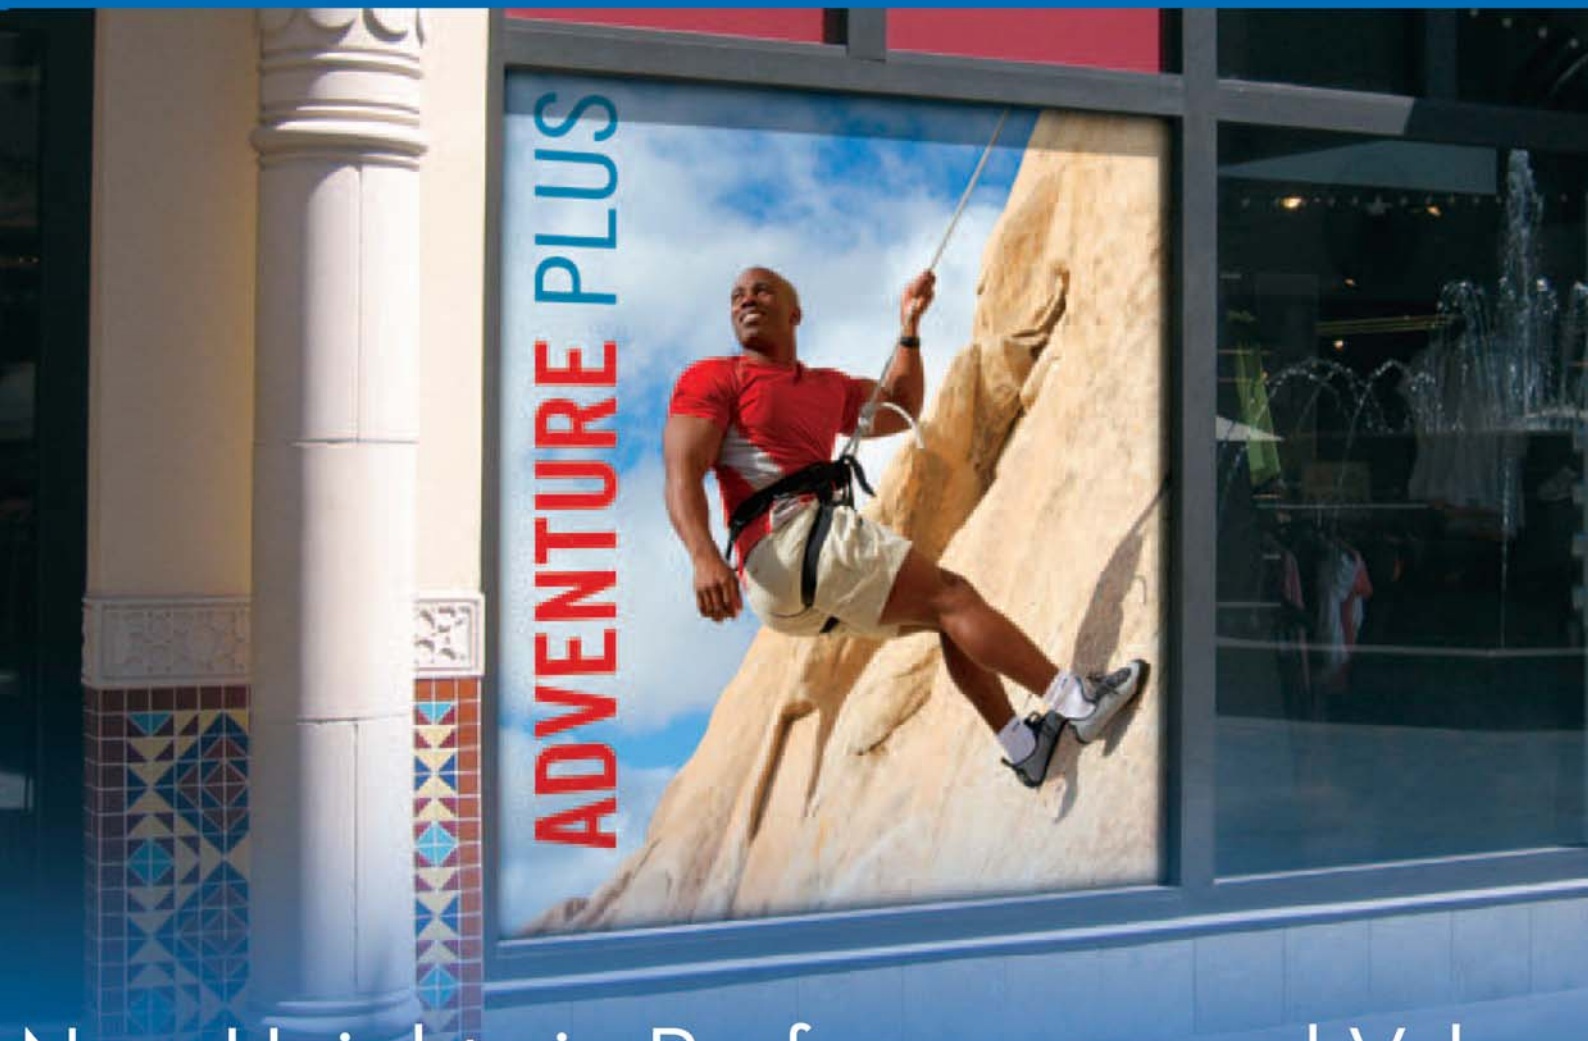

New Heights in Performance and Value





VERSAART RE-640 INKJET PRINTER

- Maximum print speed of 248 sqft/hr (23.1 sqm/hr)
- Four-color, dual CMYK ink configuration
- Advanced Roland Eco-SOL MAX ink
 - > Vibrant graphics are scratch, water and UV resistant up to 3 years without lamination*
 - > Choose from 220 mL or 440 mL cartridges
 - > Virtually odorless
- Outstanding image quality
 - > Up to 1440x720 dpi
 - > Roland Intelligent Pass Control for flawless results, free of banding
- Optional automated take-up system for overnight and unattended printing
- Supports heavy media rolls up to 88 lbs.
- Roland Intelligent Pass Control™ technology for unparalleled image quality at the highest print speeds

- Roland VersaWorks RIP software
 - > Ensures precise color management
 - > Includes the Roland Color System for spot color matching
 - > Manages up to four Roland devices on a network
 - > Wide ICC profile support
 - > Variable data printing
 - > Supports print/cut applications with GX series cutters

- Energy Star certified 

- Roland OnSupport for remote production monitoring

- Two-Year Trouble-Free Warranty**



PRODUCT SPECIFICATIONS

Model		RE-640
Printing method		Piezoelectric inkjet / Grit roller feed
Acceptable media	Width	10.2 to 64 in. (259 to 1625 mm)
	Thickness	Maximum 39 mil (1.0 mm) with liner
	Weight	Maximum 88 lb. (40 kg)
	Roll outer diameter	Maximum 8.3 in. (210 mm)
	Core diameter	3 in (76.2mm)
Printing width		Maximum 63.6 in (1615 mm)
Maximum Printing Speed		248 sqft/hr (23.1 sqm/hr) in CMYK High Speed mode
Ink cartridges	Type	Roland ECO-SOL MAX INK
	Capacity	220 cc or 440 cc
	Color	4 colors (Cyan, Magenta, Yellow, Black)
	Configuration	CCMMYYKK
Printing resolutions		maximum 1440x720 dpi
Distance accuracy		Error of less than ±0.3% of distance traveled, or ±0.3 mm, whichever is greater
Interface		Ethernet (10BASE-T/100BASE-TX, automatic switching)
Power-saving function		Automatic sleep feature
Power supply		AC 100 to 120 V ±10%, 8.2A, 50/60 Hz or AC 220 to 240 V ±10%, 4.2A, 50/60 Hz
Power consumption	During operation	Approx. 1,080 W
	Sleep mode	Approx. 14.8 W
Dimensions (with stand)		101.4 (W) x 27.8 (D) x 46.3 (H) in (2,575 (W) x 705 (D) x 1,175 (H) mm)
Weight (with stand)		298 lbs (135 kg)
Environment	Power on Power off	Temperature: 15° to 32°C (59 to 90°F) [20°C (68°F) or more recommended] / Humidity: 35 to 80%RH (no condensing)
		Temperature: 5 to 40°C (41 to 104°F), humidity: 20 to 80%RH (no condensation)
Included items		Stand, power cord, media clamps, media holder, replacement blade for sheet cut, VersaWork RIP, User's Manual, etc.

Specifications subject to change.

* Outdoor durability is based on accelerated weather tests. Results may vary depending upon location and application. Dry times vary depending on specific media characteristics. Lamination may be required for some applications or environmental conditions.

** Registration within 60 days and continuous exclusive use of Roland Inks during the first two years of ownership is required to qualify for the free second year of limited warranty coverage. Additional Terms and Conditions apply.